

GLOBAL JOURNAL OF ENGINEERING SCIENCE AND RESEARCHES
EFFECT OF SUPPLEMENTARY CEMENTING MATERIALS ON PROPERTIES OF CONCRETE

Aamir Khan*¹ & Masoom Reza²

*¹ P.G Student Department of Civil Engineering Al-Falah University, Dhauj Faridabad, Haryana, India

² Assitant Professor in Al-Falah University

ABSTRACT

Concrete is one of the frequently used constructions material on the civil sites because it has high stability, durability and structural strength. A verity of waste material are disposed of to the environment directly thereby causing huge environment impacts an emphasis is laid on reuse of the water material waste material can be used in wide variety of ways such as an admixture. This may reduce the extensive use of natural resources. There are lots of researches going on for the constructive use of waste materials. In this paper the investigation is carried out for use of fly ash and marble powder in concrete. The grade of concrete used M-25 mix with cement replacements of 5%, 10%, 15%, 20% and 30% with fly ash and marble powder simultaneous use of fly ash in civil engineering applications is gaining momentum day by day. it can be used in concrete as well as manufacture of fly ash blocks. It ultimately leads to improvement in long term durability of concrete as well as environmental benefits. The grade of cement as classified by bureau of Indian standards is OPC-53. After the experimental investigation was done it was observed that the fly ash and marble powder improves concrete properties up to 20% and 15% respectively.

Keyword: *compressive strength, fly ash(F.A), marble powder (M.P), concrete.*

I. INTRODUCTION

Due to the extraction of natural resources many wastes are generated each year. By the beginning of 1920s coal firing began at a very rapid speed for the purpose of generation of electricity. This lead to the generation of millions of tons of ash and other bi-products. Today the generation of coal ash is estimated to be around 600 tonnes annually with fly ash constituting around 75% of the total ash produced i.e. 500 tonnes annually. The fly ash is being generated by thermal power plants and factories at very rapid pace and hence its disposal is causing very serious environmental problems. The fly ash utilized in the world varies widely from 3% to maximum of 56% of the total ash being produced, average being 15%. This leads to huge amount of fly ash being unutilized and is therefore being disposed of in landfill or lagoons which costs very high to the utilizing companies, customers and has negative impacts on environment too. For the generation of electricity, coal is being preferred throughout the world. In thermal power plants, fuel lignite is being used in pulverized form which is a source of energy. On burning coal, a tremendous % of coal that numbers to 48 % is left as fly ash or bottom ash. In construction of civil structures fly ash can be used as partial substitution the cement in concrete. Even after using fly ash in civil structures there is still substantial amount of fly ash that is not being used. This unused fly ash can be utilized in road construction as a sub grade chemical additive. The lignite coal after burning give rise to fly ash which comprises about 27%. If the amount of free lime content in fly ash is more than 10% then this type of fly ash is classified as class-F fly ash. As per ASTM the self cementing period of class-F fly ash is longer when compared to that of class-C fly ash. In terms of environmental pollution, class-f fly ash causes more acute problems than class-c fly ash. A lime of about 5%-20% is added to class-f fly ash to increase the strength and make hardening process quicker. The recent studies reveal that, Turkey contains around 4 billion m³ of marble reserves, which constitutes of about 40% of the worlds potential marble reserves. With the development of modern production techniques, the process of marble treatment is ever increasing thus helping in reducing waste marbles. If the two waste products i.e. marble powder and flyash are used with OPC, it can help in enhancing the strength and durability of concrete. In India large quantities of marble powder and flyash are being generated, these waste materials if properly segregated, collected and used properly can help in reducing the disposal of fly ash and marble powder and can also help in reducing the use of large amounts of cement which consumes energy and many natural resources. Different grades of OPC are available in market and

bureau of Indian standard (BIS) classifies OPC into three grades i.e. grade 33, grade 43 and grade 53. There are no comparative studies about the effect on concrete properties when cement of varying grades is partially replaced by fly ash or marble powder. Thus this study is to investigate the effect of these two supplementary cementing waste materials on the properties of concrete.

II. LITERATURE REVIEW

2.1 Baboo Rai [1], the effect of waste marble powder on concrete by replacing cement with different percentage of waste marble powder. It was observed that on increasing replacement quantity of marble powder (replacing cement) the compressive strength falls reduces up to 10 N/mm² when the marble powder percentage in cement is between 15% to 20%. The strength reduction was observed to be constant up to 15% replacement quantity. Also the fine aggregates were replaced partially by different proportions and it was observed that the compressive strength of the concrete increased after different curing ages when the marble granule percentage was less than 10% and beyond 10% the strength of the concrete decreased.

2.2 Vaidevi [2] studied the use of waste materials generated from different manufacturing units in the making of concrete and mortar mix. The concrete of grade M-20 was prepared by replacing cement with marble powder. The mix was prepared by replacing the cement by marble powder in proportions of 5, 10%, 15% and 20%. After 14 days and 28 days of curing period the compressive strength and tensile strength were calculated and it was observed that up to substitution of 10% of marble powder in cement, the strength increases and with the increase in curing days the strength keeps on increasing.

2.3 N. Gurumoorthy [3] studied the performance of concrete by partial replacement of cement by marble dust in percentages of 10%, 15%, 20%, 25% and 30%. The compressive strength increased up to 25% replacement of cement by marble powder. Beyond 25% the strength began to decrease. So it was observed that the optimum concentration of cement replacement was 25%.

2.4 Prof. Veena G.Pathan and Prof. Md.Gulfam Pathan [4], the investigation about the use of waste marble powder in preparing concrete mix was done. The study reveals that on replacing cement with marble powder up to 20% reduces the slump of the concrete mixes. Also it was observed that replacing cement by marble powder up to 5% gives identical compressive as well as flexural strength but beyond 5% the strength decreased.

III. OBJECTIVES

The research was taken up based upon the preliminary studies and trends in the market and the need of economical materials to be used in production of concrete. The objectives of present stud are:

- To find the optimum mix design (M-25) .
- To study in detail about the effect of marble powder and fly ash on Strength and workability of concrete.
- To provide economical construction material.
- Provide safeguard to the environment by utilizing waste properly

IV. MATERIALS USED

1. Cement:

Ordinary Portland Cement (OPC) of 53 grade conforming to IS: 12269-1987 was used.

2. Marble powder:

Marble powder was collected from the dressing and processing unit in Manesar.

3. Fly ash:

Fly ash conforming to IS: 3812-2003 is a fine inorganic material with pozzolanic properties. It was collected from Prism RMC Manesar.

4. Fine Aggregate:

Badarpur sand was used as fine aggregate which conforms to IS: 383-1970 and grading zone II. The sand was sieved and then used.

5. Coarse Aggregate:

Coarse aggregate used in the investigation is angular aggregates with rough surfaces of nominal size of 20mm and conforming to IS: 383-1970. The aggregates were sieved before using them.

6. Water:

Normal tap water available in the site was used for concreting and curing

V. MIX PROPORTIONING

Table 1: Mix proportions of fly ash and cement

Type	Cement(kg)	Sand(kg)	Aggregates (kg)	Water (litre)	Fly ash (gm)	Number of cubes
Conventional	3.00	5.037	8.46	1.65	-	3
5% fly ash	2.85	5.037	8.46	1.65	150	3
10%fly ash	2.70	5.037	8.46	1.65	300	3
15% fly ash	2.55	5.037	8.46	1.65	450	3
20% fly ash	2.40	5.037	8.46	1.65	600	3
30% fly ash	2.10	5.037	8.46	1.65	900	3

Table 2: Mix proportions of Marble powder and cement

Type	Cement(kg)	Sand(kg)	Aggregate (kg)	Water (litres)	Marble powder(kg)	No of cubes
Conventional	3	5.037	8.46	1.65	-	3
5% MP	2.85	5.037	8.46	1.65	150	3
10% MP	2.7	5.037	8.46	1.65	300	3
15% MP	2.55	5.037	8.46	1.65	450	3
20% MP	2.4	5.037	8.46	1.65	600	3
30% MP	2.1	5.037	8.46	1.65	900	3

Table 3: Mix calculations per cubic meter

	WATER	CEMENT	SAND	AGGREGATE
VOLUME	197.16(kg/m ³)	358.47(kg/m ³)	688.09(kg/m ³)	1135.11(kg/m ³)
RATIO	0.55	1	1.679	2.82

VI. EXPERIMENTAL INVESTIGATION

1. Compressive strength Test

Compressive strength of any material or structure may be defined as its ability to withstand loads on its surface without developing cracks or undergoing any deflection. Any material that is under compression usually tends to reduce the size whereas in tension the size elongates.

Table 4: Compressive strength of fly ash and cement concrete after 7 days

MIX	WEIGHT (KG)	LOAD (KN)	COMPRESSIVE STRENGTH 7 DAYS(N/MM ²)
Conventional	8.100	420	18.66
95% cement,5%FA	8.170	300	13.33
90% cement, 10%FA	8.230	320	14.22

85% cement, 15%FA	8.130	350	15.55
80% cement, 20%FA	8.080	370	16.44
70% cement, 30%FA	8.140	310	13.77

Table 5: Compressive strength of fly ash and cement concrete after 28 days

MIX	WEIGHT (KG)	LOAD (KN)	COMPRESSIVE STRENGTH 28 DAYS(N/MM ²)
Conventional	8.100	620	27.55
95% cement,5%FA	8.210	490	21.77
90% cement, 10%FA	8.110	500	22.22
85% cement, 15%FA	8.210	530	23.55
80% cement, 20%FA	8.060	550	24.44
70% cement, 30%FA	8.160	470	20.88

Table 6: Compressive strength of MP and cement concrete after 7 days

MIX	WEIGHT (KG)	LOAD (KN)	COMPRESSIVE STRENGTH 7DAYS(N/MM ²)
Conventional	8.100	420	18.66
95% cement,5%MP	8.070	300	13.33
90% cement, 10%MP	8.200	310	13.77
85% cement, 15%MP	8.120	340	15.11
80% cement, 20%MP	8.110	320	14.22
70% cement, 30%MP	8.040	270	12

Table 7: Compressive strength of MP and cement concrete after 28 days

MIX	WEIGHT (KG)	LOAD (KN)	COMPRESSIVE STRENGTH 28 DAYS(N/MM ²)
Conventional	8.100	620	27.55
95% cement,5%MP	8.170	470	20.88
90% cement, 10%MP	8.190	490	21.77
85% cement, 15%MP	8.090	510	22.66
80% cement, 20%MP	8.210	460	20.44
70% cement, 30%MP	8.260	400	17.77

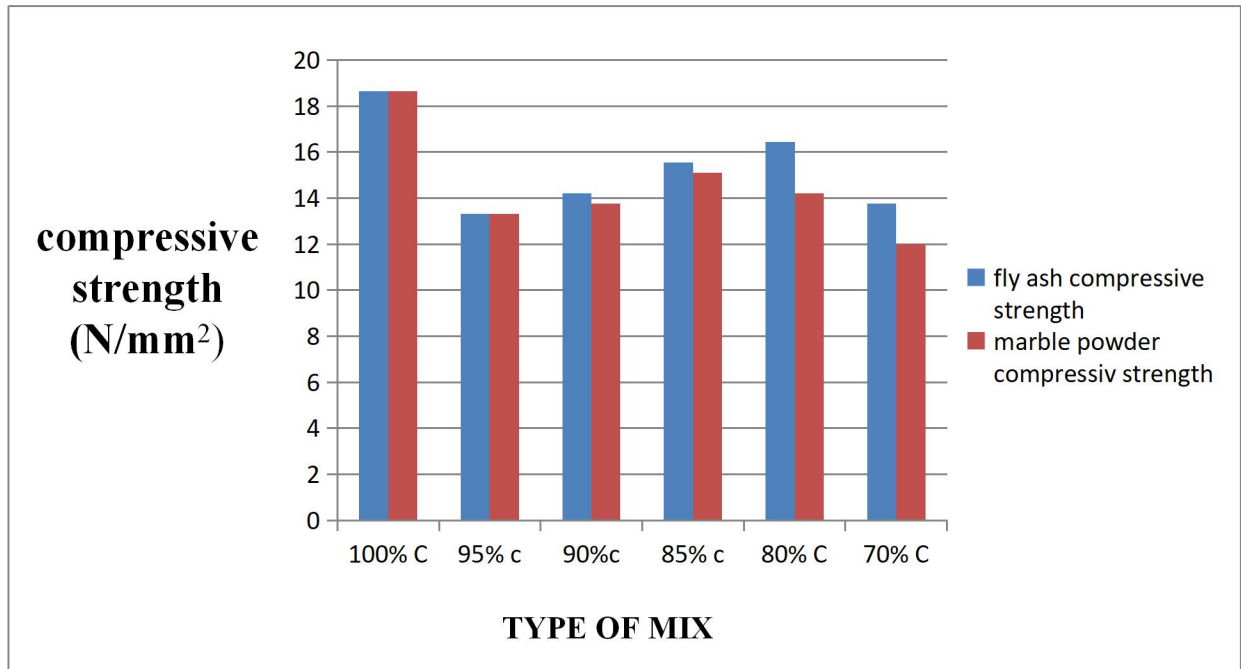


Fig 1: comparison of compressive strength of fly ash concrete and marble powder Concrete at 7Days

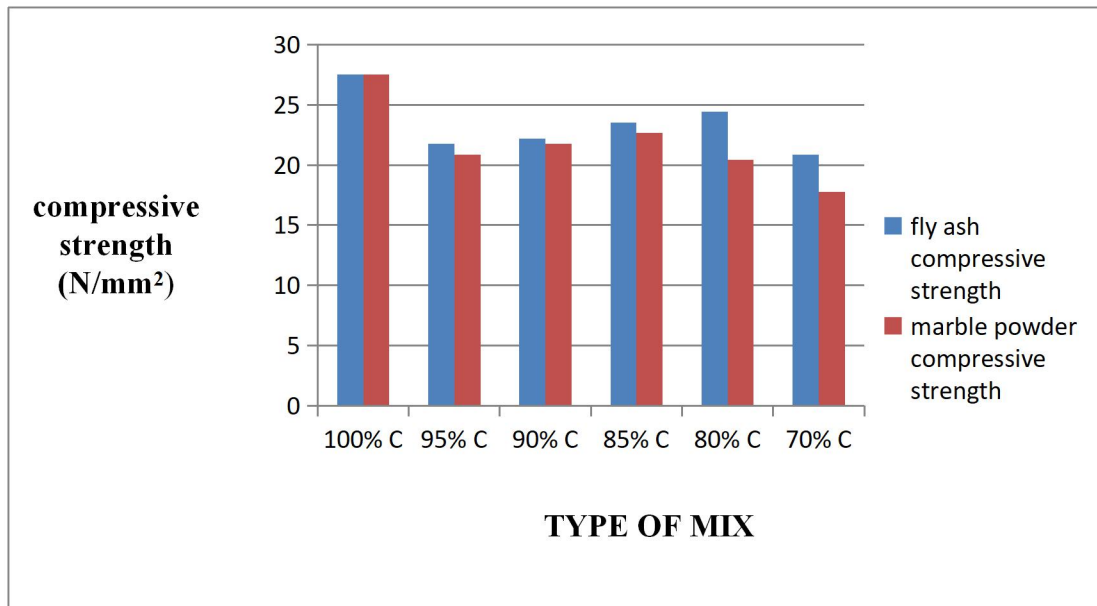


Fig 2: comparison of compressive strength of fly ash concrete and Marble powder concrete at 28 Days

VII. RESULTS AND DISCUSSIONS

- The slump of fresh concrete increases with increase in the fly ash content.
- The slump of fresh concrete decreases with increase in marble powder percentages.
- The workability of concrete increases with increase in proportions of fly ash.
- The workability of concrete decreases with increase the percentage of marble powder.
- There is no negative impact on workability of concrete by using fly ash.
- The workability of concrete when marble powder is used as partial replacement is acceptable up to 15% partial replacement of cement.
- The use of fly ash powder therefore improved the performance of the concrete.
- The compressive strength increases with increase in the fly ash and marble powder concentrations with respect to the conventional cement concrete up to certain percentage.
- The fly ash can be used up to proportions of 20% partial replacement of the cement in concrete.
- The marble powder can be used up to proportions of 15% replacement of the cement in concrete.

VIII. CONCLUSIONS

- The compressive strength of concrete when fly ash is used as partial replacement increases with age and can be used up to 20% proportion.
- The compressive strength of concrete when marble powder is used as partial replacement increases with age and can be used up to 15% proportion.
- The cost of concreting can be minimized when these materials are used.
- The properties of fresh and hardened concrete are enhanced when fly ash and marble powder are used simultaneously in concrete up to certain limit.
- The environmental pollution caused due to manufacture of cement can be reduced to a considerable extent.
- The decomposition of the waste supplementary materials, which is a serious concern, can be averted to a large extent.
- The early strength is less when fly ash and marble powder is used as partial replacement to cement.
- The compressive strength of concrete increases with age up to certain proportions of fly ash and marble powder

REFERENCE

1. Baboo Rai, Khan Naushad H, Abhishek Kumar, Tabin Rushad S and Duggal S.K , “Influence of marble powder/granules in concrete mix”, *IJCSE, Volume 1, No 4, 2011. ISSN:0976-4399, PP. 827-834.*
2. Vaidevi C., “Study on marble dust as partial replacement of cement in concrete.” *IJE, Volume 4, No 9, July 2013. ISSN:2319-7757, PP. 14-16.*
3. N.Gurumoorthy, “Influence of marble dust as partial replacement of cement in concrete”, *IJERT, Volume 3, Issue 3, march-2014. ISSN:2278-0181, PP. 740-749.*
4. Prof. Veena G.Pathan and Prof.Md Gulfam Pathan, “Feasibility and need of use of marble powder in concrete production”, *(IOSR-JMCE), 2014, e-ISSN:2278-1684, p-ISSN:2320-334X, PP. 23-26.*
5. Abdullah Anwar, Juned Ahmad, Meraj Ahmad Khan, Sabih Ahmad and Syed Aqeel Ahmad, “Study of compressive strength of concrete by partial replacement of cement with marble dust powder”, *IJMERE, 2014, ISSN(Print):2321-5747, Volume-2, Issue-3, PP. 1-4*
6. Jashandeep Singh and Er. R S Bansal, “Partial replacement of cement with waste marble powder with M25 grade”, *IJTRA, e-ISSN:2320-8163, Volume 3, Issue 2, (Mar-Apr 2015), PP. 202-205.*
7. G. Latha, A. Suchith Reddy and K. Mounika (2015), “Experimental investigation on strength characteristic of concrete using WMP as cementitious material”, *IJRSET, e-ISSN: 2319-8753, p-ISSN:2347-6710, Volume 4, Issue 12, December 2015, PP. 12691-12698.*
8. *International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume: 03 Issue: 03 | Mar-2016*

9. *EXPERIMENTAL INVESTIGATION ON SELF COMPACTING CONCRETE USING MARBLE POWDER AND SILICA FUME INTERNATIONAL JOURNAL & MAGAZINE OF ENGINEERING, TECHNOLOGY, MANAGEMENT AND RESEARCH Regd No: APENG/2011/47294.*
10. *IS CODE 383-1970 FOR COARSE AND FINE AGGREGATES.*
11. *IS CODE 456-2000 FOR CONCRETE.*
12. *IS CODE 10262-2009 FOR DESIGN MIX.*