

**GLOBAL JOURNAL OF ENGINEERING SCIENCE AND RESEARCHES**  
**Pan-Tilt Camera Modeling and Calibration Methodology**

**S. P. Jogi**

Assistant Professor, ASET, Amity University Haryana, Gurgaon, India

**ABSTRACT**

Pan-tilt camera and its application is growing day-by-day. In the era of automation, it is required to have an efficient surveillance system. However, machine learning or Artificial intelligence based further enhance its capability. Besides, control of camera is utmost important to deploy such system. Here in this study, a pan-tilt camera system modeling and its methodology to calibrate is proposed. A proper and appropriate intelligence through surveillance could help combat enemies and terminate the threat. The proposed project aims at creating a pan-tilt camera surveillance system with features of object detection and weapon trigger controlled manually from the control room situated far away.

**Keywords:** *Pan-Tilt Camera Modeling and Calibration Methodology*

**I. INTRODUCTION**

The camera motion is modeled as two idealized rotations around the origin, followed by a perspective camera transformation as shown in Figure 1.4. This transformation can be written as a sequence of matrix operations.




Figure 1 Simple pan-tilt camera motion model. Pan and tilt are modeled as axis aligned rotations around the camera's center of projections

$$\begin{bmatrix} I_x \\ I_y \\ I_w \end{bmatrix} = CR_y R_x \begin{bmatrix} x \\ y \\ z \end{bmatrix} \quad (1)$$

where  $[x \ y \ z]^T$  is a point in world coordinates. A rotation around the x axis  $R_x$ , and the y-axis,  $R_y$ , correspond to tilt and pan respectively. Finally a perspective camera transform,  $C$ , results in the image plane coordinates at which the point is observed,  $(I_x/I_w, I_y/I_w)$ .

For an ideal pan-tilt camera this model is sufficient. However, the assumption that pan and tilt axes of rotation are orthogonal, aligned with image plane and through the camera's nodal point are frequently violated. The usual solution to this problem is careful engineering so that the assumptions are as nearly true as possible [1]. Since our

system uses commercially integrated pan- tilt cameras that significantly violate the assumptions and cannot be easily modified, a better model is needed.

## II. Methodology

### Improved pan-tilt camera model

When a pan-tilt camera is assembled, it is difficult to ensure that the axes of rotation intersect the optical center of the camera imaging system. In addition, the axes are unlikely to be exactly aligned. In order to model the actual motion of the camera, new parameters can be introduced into camera model. As shown in Figure 1.5, rather than being coordinate frame aligned, the pan and tilt degrees of freedom can be modeled as a rigid element that rotates around each of these axes. This model more closely approximates the actual camera geometry, and can be written as

$$\begin{bmatrix} I_x \\ I_y \\ I_w \end{bmatrix} = CT_{pan} R_{pan} T_{pan}^{-1} T_{tilt} R_{tilt} T_{tilt}^{-1} \begin{bmatrix} x \\ y \\ z \end{bmatrix} \quad (2)$$

Where  $R_{tilt}$  is 3x3 rotation matrix which rotates tilt angles around a vector in the direction of tilt axis.  $R_{pan}$  is analogous. These axes do not necessarily pass through the origin, and  $T_{pan}$  and  $T_{tilt}$  represent translation vectors from the origin to each axis. Thus the projection of a point in space onto the image plane can be found as a function of current camera pan and tilt parameters.

The above models assume that the angular rotation around each axis is known. Of course the motor control of each axis occurs in terms of some unknown units, and a calibrated mapping to angular units is required. In case of EVI-D30 cameras used in our system, rotations are specified to the camera in degrees, and empirical test suggest that angular rotation was in fact well calibrated.

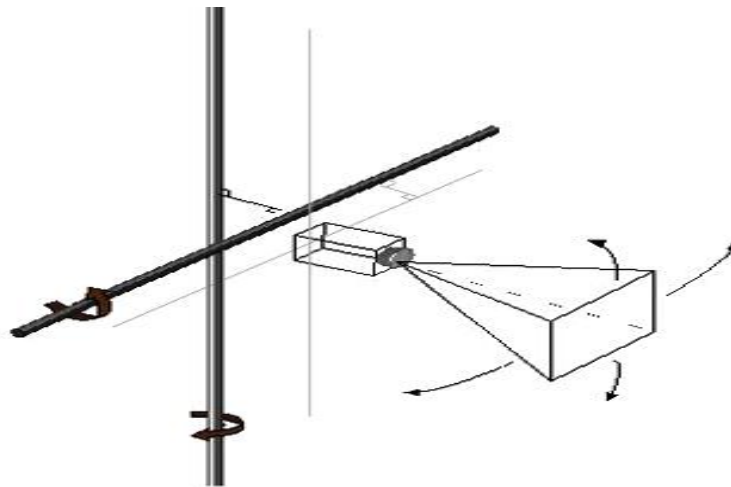


Figure 2 Improved model of camera motion. Pan and tilt motions are modeled as rotations axes around arbitrary in space

### III. Calibrating The Model

The above model specifies the generic relations between geometric components. Each camera will vary within this general model, and determining the specific parameters of the model is typically referred to as calibration. In the case of this model, the parameters to be determined are the two axes of rotation in addition to the standard set of camera intrinsic and extrinsic parameters. One reason that the simple camera model described above is often used despite its inadequacies is the ease of calibration. Since the axes of rotation are given relative to the camera image plane, it suffices to calibrate the camera in a single configuration and then apply the model when a new set of pan-tilt rotations is required. In the more general case of arbitrary axes, a great deal of additional data needs to be collected in order to robustly determine all parameters. Traditional camera calibration proceeds by arranging a set of known 3D features in the camera's view frustum. The case of arbitrary axes, a great deal of additional data needs to be collected in order to robustly determine all parameters. Traditional camera calibration proceeds by arranging a set of known 3D features in the camera's view frustum. These are typically attached to some calibration target. The projection of each 3D feature is then observed on the camera image plane. These observations are 2D data points. Camera parameters can be determined by solving

$$\arg \min_{\Phi} \{C(\Phi, X_{3D}) - X_{2D}\} \quad (3)$$

where  $C$  is the camera model that defines the projection of points onto the image plane,  $\Phi$  is the set of camera parameters to be determined,  $X_{3D}$  is the vector of 3D feature locations, and  $X_{2D}$  is the vector of corresponding image plane observations. Since  $\Phi$  often includes radial lens distortion terms in addition to extrinsic geometric pose, minimizing this equation is usually framed as a non-linear search problem. In order to obtain a good estimate of the parameters,  $\Phi$ , it is necessary that the spatial features,  $X_{3D}$ , cover the working volume, and that the observations,  $X_{2D}$ , cover the image plane. In the event that coverage is not comprehensive, parameters that fit the observed space will be obtained. If a target later moves outside of the observed calibration range, the model will extrapolate into the new area. Since data extrapolation is known to be unreliable relative to interpolation, it is beneficial to obtain maximum coverage. In the case of the pan-tilt camera model considered here, two axes of rotation are added to the set of parameters,  $\Phi$ . Since the current pan and tilt parameter settings must also be included, the equation now becomes

$$\arg \min_{\Phi} \{C(\Phi, \text{pan tilt}, X_{3D}) - X_{2D}\} \quad (4)$$

where *pan* and *tilt* are vectors specifying the setting corresponding to each feature-observation pair. As before, good calibration requires adequate coverage of the space. In this case, coverage of the range of pan and tilt parameters is implied, as well as coverage of space. Thus the procedure for calibrating this camera model is an iteration of the procedure used for a static camera. The pan-tilt parameters are set to some value, .e.g. (0°, 0°). A set of feature-observation pairs is obtained. Then the pan-tilt parameter values are changed to some new value, .e.g. (100°, 50°) and an additional set of feature observation pairs is obtained. The procedure is repeated until the range of camera motion has been covered. All vectors are concatenated and the equation is minimized.

### IV. Results

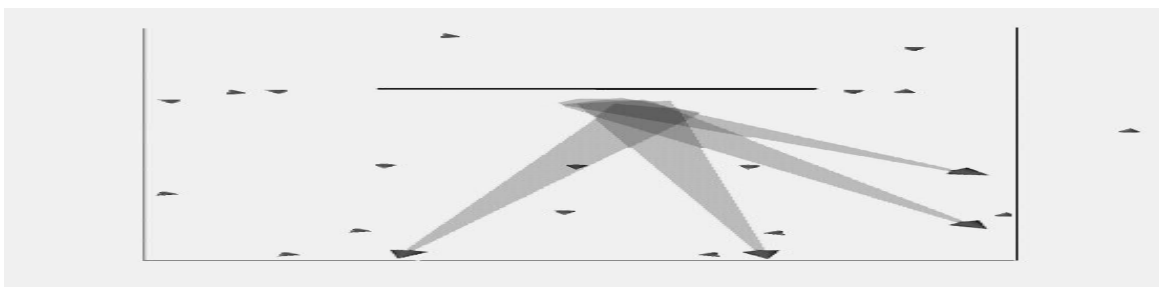


Figure 3 Top down view of pan-tilt camera placement. Cameras can be directed such that their view frustums intersect at the desired target feature location. Small triangles indicate the position of static cameras in the tracking network.

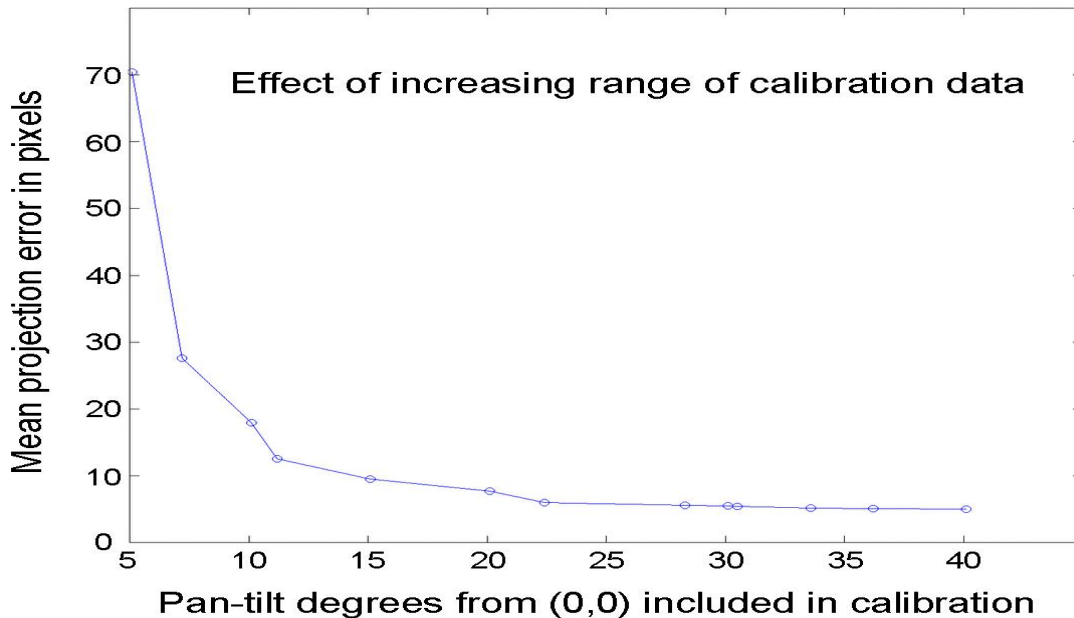


Figure 4 Plot of angular pan-tilt coverage vs. calibration quality. Including calibration data from a larger range of motion improves the quality of the calibration

## V. Conclusion

The most aspect of the system lies in the fact that there exists an autonomous relation between the hardware control and the equipment control yet a cordial relation between the two exists. This can be realized by the fact that although the system can be remotely controlled but for a precise and specific function the equipment controller can also control the hardware for adjustments. The main applications of the project can involve from military applications to commercial uses. Some of the more phenomenal advantages are as follows.

## VI. MILITARY AND DEFENCE

1. Environment acquisition including terrain mapping via image processing.
2. Target locking for objects in motion.
3. Remote control of a mounted weapon to engage in fire.
4. Identifying heat signatures in enemy areas.
5. Discriminating between friendly and enemy units.

## VII. COMMERCIAL USES

1. Precise laser operations for cutting materia.
2. Image processing and recording.
3. Laser drilling a defined path.

## REFERENCE

1. Palaniappan S., "Image Processing", *International Journal of Computer Applications*, Volume 116 – No. 11, April 2015.
2. Emmanuel A. , MATTHEWS V.O., "Pan-Tilt Camera", *International Journal of scientific & engineering research*, Volume 2, Issue 7 – July, 2011.
3. Ahmed ElShafee, Karim AlaaHamed, "Design and implementation of Matlab"-*International Journal of Computer*, Volume 6, No 8 - August, 2012.

4. Rojatkar D. V., "Introduction to Arduino"- *International Journal of Advanced Research in Computer Science and Software Engineering, Volume 5, Issue3 – March 2015.*
5. Agapito L. de, Hartley R., and Hayman E., *Linear selfcalibration of a rotating andzooming camera. In Proc. IEEE Int. Conf. CVPR99, pages 15-21, 1999.*
6. Collins R.T. and Tsin Y., "Calibration of an outdoor active camera system".*In Proceedings of CVPR99, pages 528-534. IEEE Computer Society, June 1999.*
7. Davis J. and Chen X., "Calibrating pan-tilt cameras in wide-area surveillance networks". *In Proc. of ICCV 2003, Vol 1, page 144-150, October*
8. Lei Zhang, KeXu ,ShiqiYuRuiqing Fu and YangshengXu, "An Effective Approach for Active Tracking with a PTZ Camera", *Proceedings of the 2010 IEEE International Conference on Robotics and Biomimetics, December 14-18, 2010,*
9. Seoktae Lee and ZixiangXiong,"A Real-Time Face Tracking System Based on a Single PTZ Camera" ,*IEEE Conference 2015.*
10. Lin S-J , HaoRen, Sing C., "PTZ Camera based position tracking in surveillance system" , *IEEE International Conference 2015.*
11. FaliangChang, GuoqiangZhang ,Xiaolin Wang , and Zhenxue Chen, "PTZ Camera Target Tracking in Large Complex Scenes", *IEEE Proceedings of the 8th World Congress on Intelligent Control and Automation ,July 6-9 2010.*